

Objective: 30mm Mono-tube
Optical System: 6-24x
Objective: 50mm
Reticle: AMX IR
Illumination: Red - 6 Levels (with Off Positions In-between)
Focus/Parallax: Side Focus - 9m / 10yds to Infinity

Field of View: m @100m / ft @100yds 7 - 1.8m / 21.0 - 5.2ft
Eye relief: 90mm / 3.5"
Length: 378mm / 14.9"
Weight: 765g / 27oz


Waterproof, Shockproof, Nitrogen purged.
All calibre rated.

FFP AMX IR RETICLE



The FFP AMX IR reticle was developed specifically for first focal plane optical systems and based around the common principles of mil spaced reticles.



The FFP AMX IR offers multiple aim points, useful when shooting at longer distances. Half Mil Dot spacing on the lower post provides increased aim points for long shots. The horizontal bars are positioned at 0.5, 1.5, 2.5, 3.5 and 4.5 Mil spacing. Hollow posts are segmented into Mil spacing and can be used for bracketing.

The mil spaced reticle and $\frac{1}{10}$ MRAD turrets make for easy point of aim adjustment. Every 10 clicks on the turret will measure exactly 1 mil spacing on the reticle, also known as 1 MRAD. Because of FFP this is true on all magnifications.

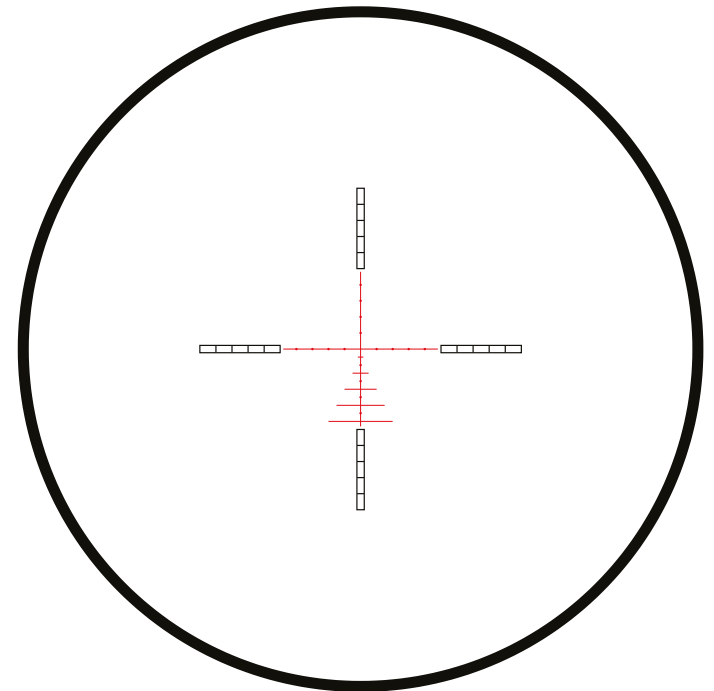

MORE RETICLE INFORMATION

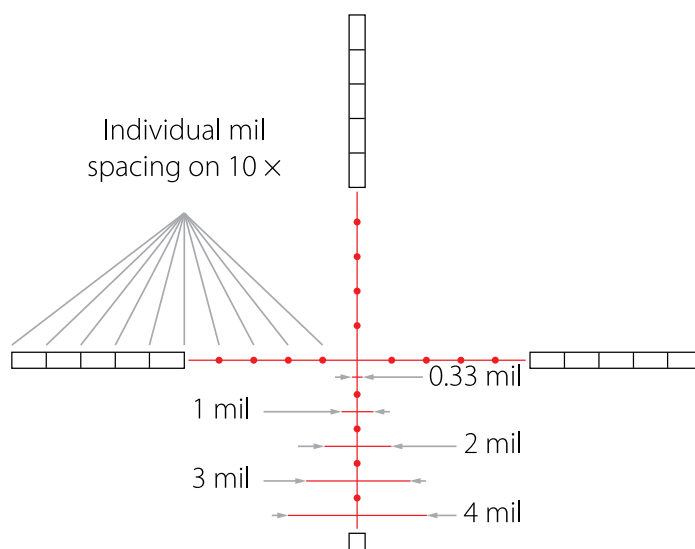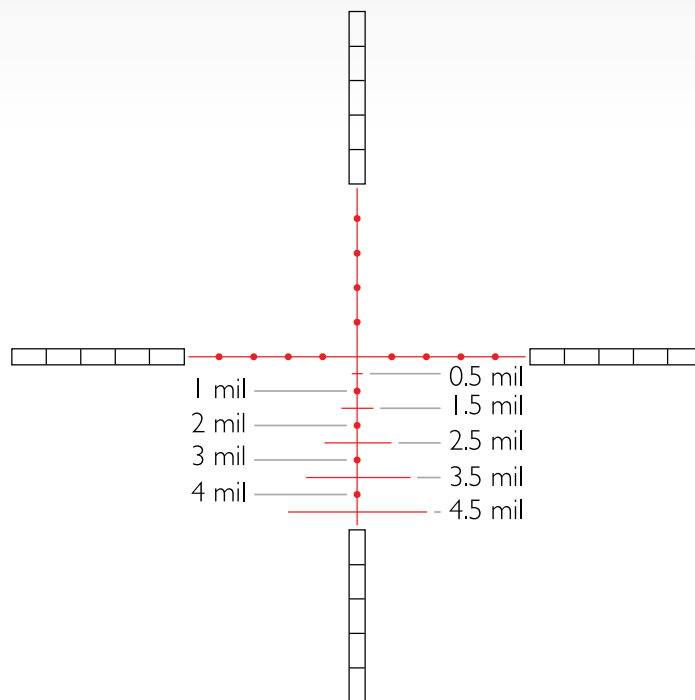

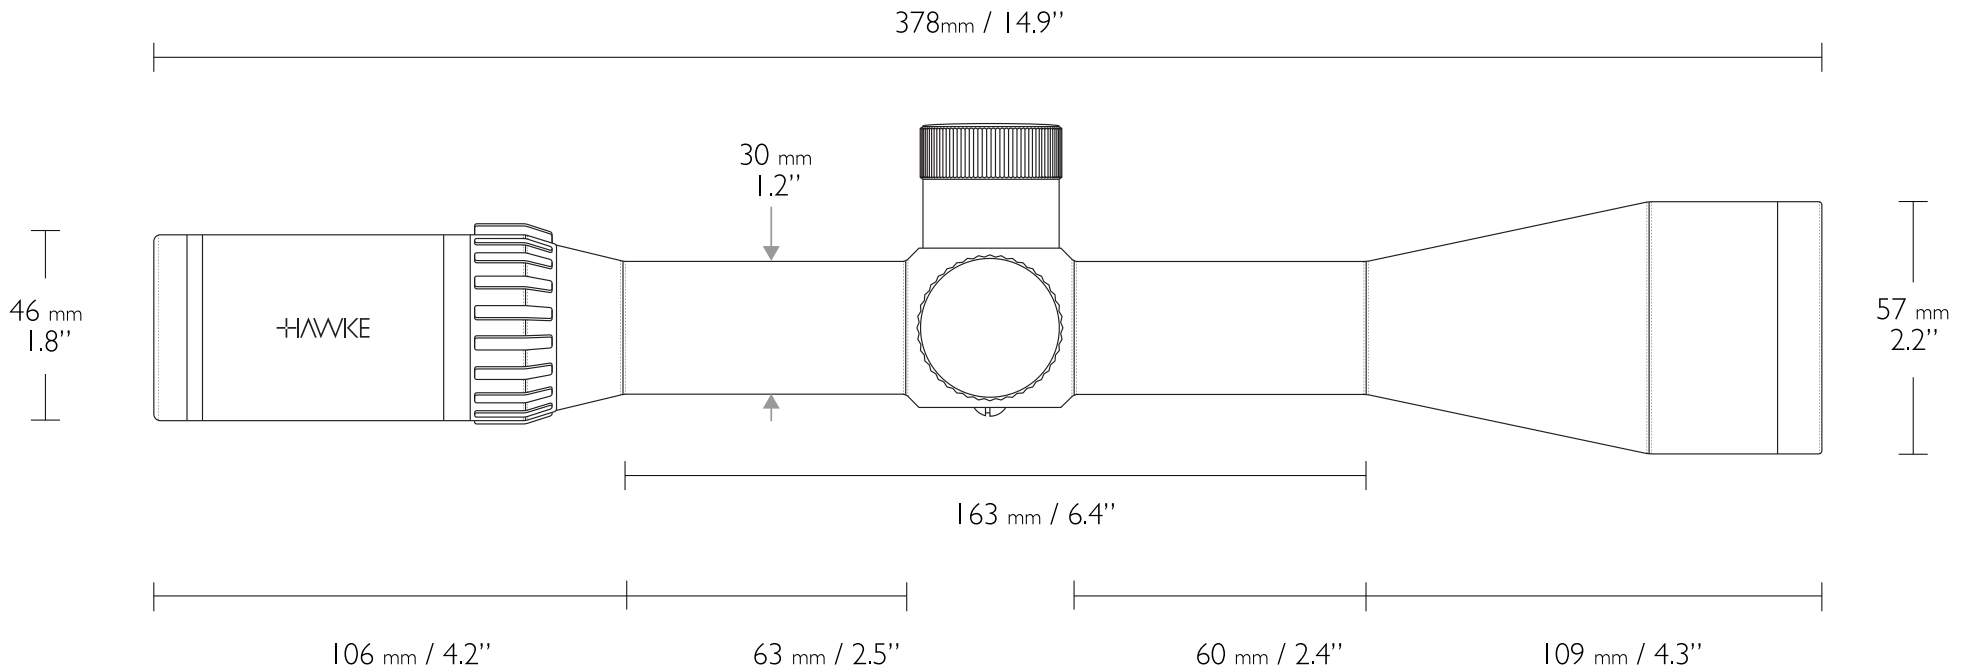

Material: Aluminum

Exit Pupil: 8.3 - 2.1mm / 0.33 - 0.08

Ocular Type: Fast Focus

Elevation Increment: $\frac{1}{10}$ MRAD

Elevation Adjustment Range: 17 MRAD

Windage Increment: $\frac{1}{10}$ MRAD

Lens Coating: Fully Multi-Coated - 16 Layers

Power Selector Style: Rubber Coated Posi-Grip

Focal Plane: First Focal Plane (FFP)

Warranty: Hawke Worldwide Warranty

Windage Adjustment Range: 17 MRAD

Turret Caps: YES

Turret Type: Target

SUPPLIED WITH



Box



Instruction Manual



Lens Cloth



4" Sunshade



Metal Flip-Up Lens Covers



Flip-Up Removal Tool



4" Sidewheel



Sidewheel Tool



Hex Key



CR2032 Battery