


Bluetooth Remote Shutter



Owner's Manual

*Smart phone OS update or change in the future might lead to incompatible

Product illustration

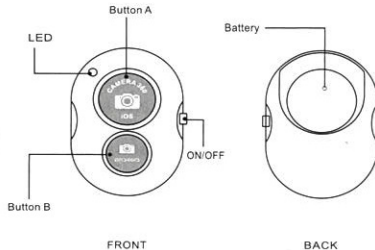

Specifications

MODEL I Shutter

Communication	Bluetooth Version 4.0
Transmit frequency	2.4GHz -2.4835GHz
Communication distance	10m(30ft)
Battery life	CR2032 X1 cell/about 6 months under working in 10 times a day
Dimension	48mm X 30mm X 10mm
Weight	About 8g

Battery




Bluetooth Remote Shutter



Owner's Manual

*Smart phone OS update or change in the future might lead to incompatible

Product illustration

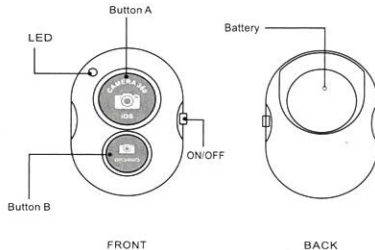

Specifications

MODEL I Shutter

Communication	Bluetooth Version 4.0
Transmit frequency	2.4GHz -2.4835GHz
Communication distance	10m(30ft)
Battery life	CR2032 X1 cell/about 6 months under working in 10 times a day
Dimension	48mm X 30mm X 10mm
Weight	About 8g

Battery



Positive pole upwards to install the battery.

How To Use

Easy to set up, Easy to use



1. Paring

- Turn on the shutter by switching the on/off button, the shutter will enter into pairing mode and indicator LED starts flash quickly at the same time
- Activate the Bluetooth function on your phone and sourcing the devices around
- Select the device of "I Shutter" from the list and pairing will be finished automatically in few seconds

2. Select APP

Use inbuilt camera APP to taking the photos via i Shutter or you can download the APP of "camera 360" from Google play if in built camera cannot be supported, check the compatible device and APP in following instruction



Key Word Search in
GooglePlay and
App Store "Camera 360"

3. Shooting

Select a correct APP and press the proper button on the shutter for IOS and Android phones to taking the photos.

Compatible devices

Compatible with Android 4.2.2 OS or newer and iOS 6.0 or newer

Compatibility List	inbuilt camera app	camera360 app
iPhone 5s/5C/5, iPhone 6s/6/6plus/6s plus, iPhone7/7plus iPad with Retina Display		
Communications Bluetooth version 4.0 and above Android operating system		
Other android phones	not use	